

DVD HOMETHEATER SYSTEM

Firmware Update

Contents

1. Check Product's F/W Version
2. Update by Disc or USB device


1. Check Product's FIRMWARE Version

- Turn on the product. Make the tray open by pressing ONEN/CLOSE button.



- Press MENU button on the remote controller, then press Numeric button 8,9,5.
- In some case of 5-Disc supported models, Play an DVD disc first
,before Tray open
- Do the same procedure mentioned before
: press Menu, 8, 9, 5 buttons on the remote controller
(Model name : HT-DB6XX, HT-DS6XX, HT-P4X)

- Product's FIRMWARE Version and File name is displayed in screen.

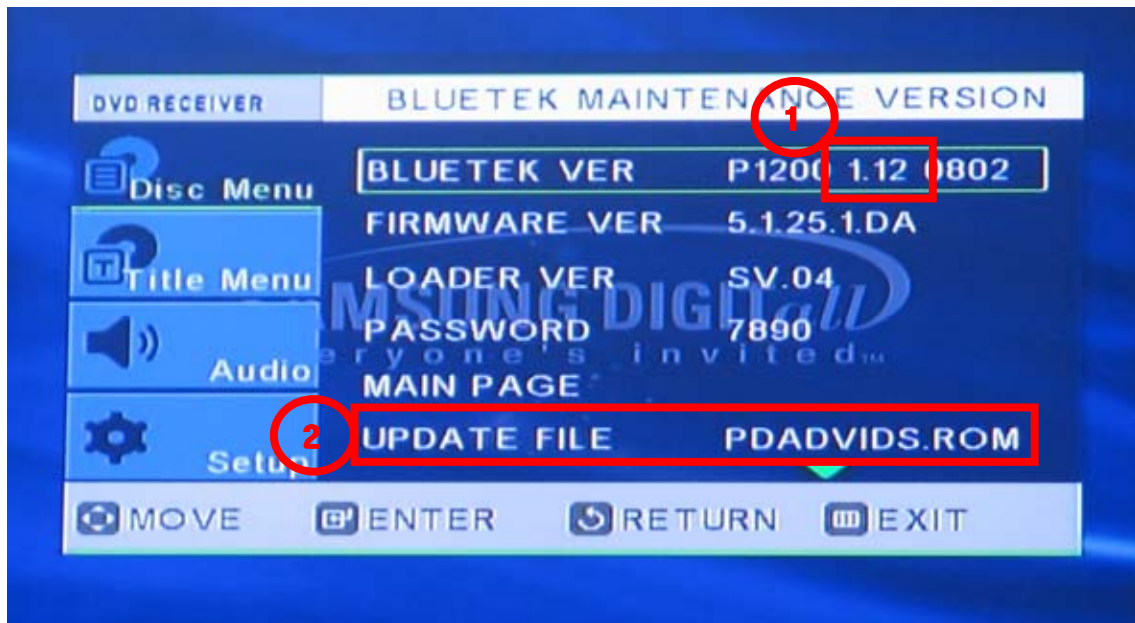

① : It shows Firmware version of product

Above screen, The Version is 1.12.

② : It shows Firmware File name of product.

Above screen The file name is PDADVIDS.ROM.

2. UPDATE by Disc or USB Device

- In case of Using a disc, Make an update disc under below recommendation.

. Disc type : ISO type

. Multi-session : No Multi-session

. Recording speed : under 8x

- You can update new F/W, by playing the update disc

- For the USB HOST playback supported model, Copy F/W file to USB device

.Format the USB Device

.Copy the firmware file to USB Memory device

- You can update new F/W, by select USB function after USB device plug-in

► Important notice

- Check the F/W file name of the set and file name of new firmware you want to update is same


- If the file name is different between New F/W file and filename on the set,

Firmware UPDATE can not be done.

- Turn on the product, Play an Update disc or a USB Device
- Firmware update is carried, repeating ERASE and WRITE after READING



- After Update complete, The set goes to turn off and turn on state automatically.
- Press ■(STOP) button on the main unit in “No disc” condition.

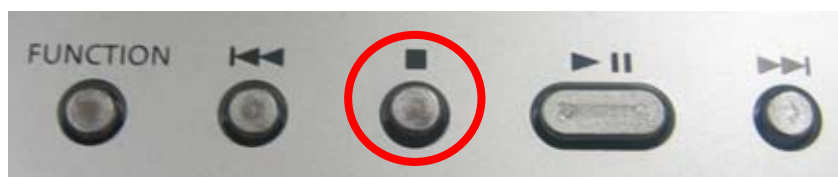

- Pressing the button continuously until INITIAL display in the Display window



- In power off condition, Press ■(STOP) button on the main unit again.
- Pressing the button until the Standby LED on the main unit blink.



- After initial, you can select an OSD language in the SETUP Menu

